

C5255 / C5250 / C5240 / C5235










The new **imageRUNNER ADVANCE C5200 series** improves on our top-range multifunctional devices. From a simple, intuitive interface to enhanced document capabilities, the updated series is even faster than before – all without compromising on quality. Add to that cloud capability and holistic document solutions and you can see why the imageRUNNER ADVANCE series gets its name.

And that's the way your business should be. Simply advanced.

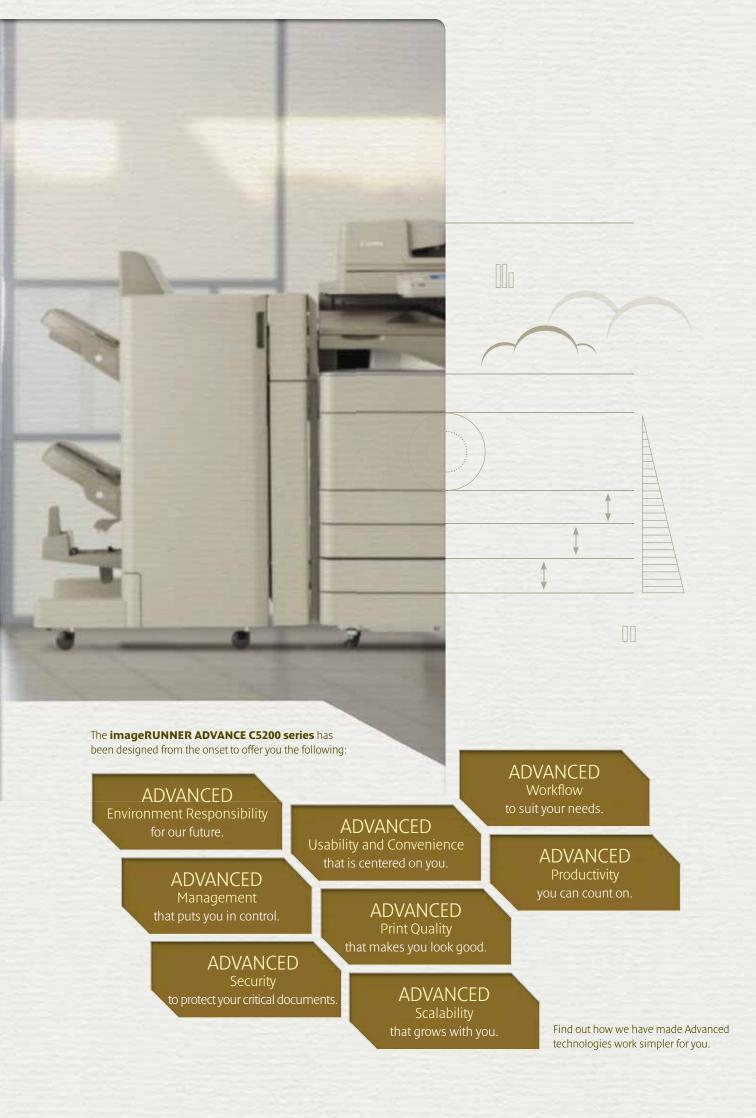





Meet the multifunctional device that is optimized for convenience and speed - your way.

Intuitive User Interface



You will notice the large, full-color 8.4" high resolution TFT screen that boasts wide viewing angles and exceptional clarity. The Main Menu gives you instant access to all your system functions, letting you configure the number and size of icons, and even the wallpaper on the menu screen. You can even tailor it to suit individual or workgroup preferences. Quick Menu allows you to accomplish more in less time by streamlining complex, frequently used settings and workflows to be saved and run at the touch of a single button.



Maintain Your Productivity

The imageRUNNER ADVANCE C5200 series is designed to keep your business going. Our innovative toner system allows you to change out toners even during printing. The inbuilt paper sensor is also intelligent enough to detect paper sizes accurately, reducing paper jams and misfeeds.



The inbuilt onscreen tutorial helps you explore the full capabilities of the imageRUNNER ADVANCE C5200 series, and enables you to learn and use more advanced functions with ease.



The imageRUNNER ADVANCE C5200 series comes with a USB port that lets you scan to or print* files directly from your USB drive or memory card at the device.

* Optional accessories are required for print.



ADVANCED

PRINTQUALITY

Quality prints that truly shine.



High Resolution Brilliant Printouts



Combine the E-drum imagePRESS technology with a 1200x1200 dpi printing resolution, you get highly defined printouts, image consistency and high speed printing. Matched with the pQ Toner and an intelligent controller, the imageRUNNER ADVANCE C5200 series truly brings you the crispest, most vibrant color printouts.



Canon's dual processor system meets the rigorous demands of today's businesses. The image processor board works with the scanner, adjusts images and provides superior image processing. In tandem, the information processor controls the user interface and coordinates device networking and connectivity. Together, they give you better results with lesser wait.





Adobe



Fiery Print Controllers

For an exceptionally high level of productivity and advanced color management workflow control, get the powerful Fiery print controller options – imagePASS-B2 and ColorPASS-GX400*. Both controllers are Variable Data Printing (VDP) ready and support a variety of VDP languages.

* Only for iR-ADV C5255

Genuine Adobe PostScript 3

The imageRUNNER ADVANCED C5200 series supports Genuine Adobe PostScript 3 printing capability. This enables you to deliver the desired printout quality without worries of font incompatibility. Work seamlessly with Postscript workflow and achieve faster, higher quality printouts – not just emulations. Direct PDF printing and full support of Adobe fonts also translates to improved office productivity.



@Copy PDF Pro Office

eCopy® PDF Pro Office, the latest enterprise-ready PDF solution from Nuance, is the smarter PDF desktop software companion to Canon MFDs. This powerful, easy-to-use PDF solution that lets you create, convert, and collaborate for increased productivity and cost savings.


ShareScan. Flack your (accessor to books and search laid. Flack your (accessor to books and search laid.) Flack your (accessor to books and search laid.)

@Copy ShareScan Suite

eCopy® ShareScan Suite transforms paper-based data safely and directly into electronic workflows. From the imageRUNNER ADVANCE device, you can scan, extract, classify, index and convert paper information into digital information that flows effortlessly into and through the electronic channels of your business.

IW SECURE AUDIT MANAGER EXPRESS

This software enables document distribution oversight and safeguards against potential information espionage or abuse by logging text and image data whenever users utilize the device.

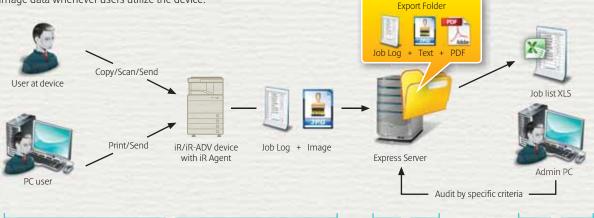

- On-device imageRUNNER Agent captures log and image data
- o2 Info is sent to Express server for OCR; image and text exported
- Express Audit Tools allows compilation and extraction of key info



iW Accounting Manager for MEAP

Track your organization's print consumption through detailed and vital information of how your devices are actually used, all without the need for additional manpower or equipment.



uniFLOW

uniFLOW is designed to save you time and money by providing effective controls over your entire print and multi-functional device fleet. The uniFLOW solution can be built from several different components depending on your needs.



DECIFICATIONS imageDUNNIED ADVANCE CEROO Series

Witness the significant improvement in your business communication capabilities. Move your business forward with the new imageRUNNER ADVANCE C5200 series today.

To arrange for a demonstration, simply contact any of our sales staff in the relevant contact overleaf.

Туре	Reader, Printer Sepa	rated, Desktop		
Maximum Original Size	A3			
Copy Sizes	Cassette	305 x 457mm, A3, A4, A4R, A5R, B4, B5, B5R		
сору лисэ		Custom Size 139.7 x 182mm to 304.8 x 457.2mm		
		Optional Envelope Feeder, No.10 (COM10),		
	Cto al. Dunana	Monarch, DL, ISO-C5		
	Stack Bypass	A5R - SRA3 (320 x 450mm), Envelopes Custom Size 99 x 140mm to 320 x 457mm		
Resolution	Reading	600dpi x 600dpi		
resolution	Copying	600dpi x 600dpi		
	Printing	1200dpi x 1200dpi (text/line only)		
Copy/Print Speed	A4 (B&W/Color)	C5255: 55/51ppm		
		C5250: 50/45ppm		
		C5240: 40/35ppm		
	A3 (B&W/Color)	C5235: 35/30ppm		
	AS (BAVV/COIOI)	C5255: 28/26ppm C5250: 28/26ppm		
		C5240: 20/18ppm		
		C5235: 20/18ppm		
Magnification	Zoom	25-400%		
First Copy Time	Black-and-White	3.9sec (C5255/C5250), 5.4sec (C5240/C5235)		
	Full Color	6.0sec (C5255/C5250), 8.1sec (C5240/C5235)		
Warm-Up Time	31 seconds			
Multiple Copies/Prints	1 to 999 sheets			
Duplexing Danas Weight	Standard automatic			
Paper Weight	Cassette Stack Bypass	52 to 220gsm 52 to 256gsm		
Paper Capacity	Stack Bypass Standard	550 sheets x2 cassettes (80gsm)		
гарст сарасну	Standard	Stack Bypass: 100 sheets (80qsm)		
	Optional	550 sheets x2 cassettes (80gsm)		
	Paper Deck	2,700 sheets (80gsm)		
	Total Capacity	5,000 sheets		
CPU	1.2GHz			
Memory	Standard: 2GB RAM	Maximum: 2.5GB RAM		
Hard Disk Drive		vailable Disk Space: 10GB)		
		ilable Disk Space: 115GB)		
Interface Ethernet	(1000BaseT/100Ba			
Wireless LAN	(IEEE802.11b/g, Op			
Power Supply Power Consumption	220-240V AC, 50/6	/C5250), 1.3kW max (C5240/C5235)		
Dimensions (W x D x H)		800mm x 620mm x 700mm		
Difficilisions (** x D x 11)	With the Duplex Color Image Reader Unit-E1: 950mm x 620mm x 715mm			
	With the Color Image Reader Unit-F1: 931mm x 620mm x 712mm			
	With the Color Image Reader Unit-F2: 831mm x 620mm x 700mm			
Weight	Only the Main Unit: Approximately 139kg			
	With the Duplex Color Image Reader Unit-E1: Approximately 153kg			
	With the Color Image Reader Unit-F1: Approximately 148kg			
Bring Consideration	With the Color Imag	e Reader Unit-F2: Approximately 144kg		
Print Specification PDL	LIEDII (Standard) DO	T. Ec/6 (Optional) Adoba PostScript 7 (Optional)		
Resolution		CL 5c/6 (Optional), Adobe PostScript 3 (Optional) (Text/Line only), 600dpi x 600dpi		
Memory	2GB (Uses Main Un			
Hard Disk		vailable Disk Space: 15GB)		
	Maximum 1TB (Available Disk Space: 629GB)			
CPU	Canon Custom Processor, 1.2GHz (Uses Main Unit CPU)			
Supported OS	PCL	Windows 2000/XP/Server2003/Vista/Server2008/Win7		
	Adobe PostScript 3	Windows 2000/XP/Server2003/Vista/Server2008/Win7,		
UFR II	Windows 2000 VP	MacOSX (10.4.9 or later) /Server2003/Vista/Server2008/Win7/Linux,		
OTATI	Mac OSX (10.4.9 or			
Mac-PPD	Mac OS 9.1 or later, Mac OSX (10.2.8 or later)			
Interface	Ethernet (1000Base-T/100Base-TX/10Base-T)			
	Wireless LAN (IEEE802.11b/g, Optional), USB2.0			
Network Protocol	TCP/IP (LPD/Port9100/WSD/IPP/IPPS/SMB/FTP), IPv6,			
D. II Cara	IPX/SPX (NDS, Bindery), AppleTalk			
Pull Scan	Network TWAIN Driv	ver color/8bit grayscale/2bit Black & White)		
Send Specification (S		color obit grayscaler zbit black & Wille)		
Scan Resolution		x 150dpi, 200 x 100dpi, 200 x 200dpi,		
		x 300dpi, 400 x 400dpi, 600 x 600dpi		
Destinations		(SMTP), PC (SMB, FTP), iWDM, WebDAV		
Address Book	LDAP, Local (Max.18	300)		
File Format	TIFF, JPEG, PDF, XPS	High compression PDF/XPS, PDF/A-1b,		
	Optimize PDF for W	eb		
Universal Send Adva				
Universal Send Adva	Outline PDF (Trace 8	Smooth), Searchable PDF/XPS, Reader Extensions PDF,		
Optional Accessories Universal Send Advan File Format Universal Send Secur	Outline PDF (Trace & Office Open XML for			

)
Th	el	oier	•
MAL	_AYS	NBHE	

Encrypted PDF, Device Signature PDF/XPS

Optional Image Read		
Duplex Color Image R		
Paper Size	A3, B4, A4, A4R, B5, B5R, A5, A5I	
Paper Weight	Single sided original	42 to 157gsm
	Double sided original	50 to 157gsm
Original Tray Capacity	150 sheets (80gsm)	
Document Scanning	Copying	1-sided scanning: 75 sheets/minute
Speed		(A4 in Black-and-White at 600dpi)
		2-sided scanning: 37.5 sheets/minute
		(A4 in Black-and-White at 600dpi)
		1-sided scanning: 51 sheets/minute
		(A4 in Full Color at 600dpi)
		2-sided scanning: 25.5 sheets/minute
		(A4 in Full Color at 600dpi)
	Scanning	1-sided scanning: 75 sheets/minute
		(A4 in Black-and-White/Full Color at 300dpi)
		2-sided scanning: 60 sheets/minute
		(A4 in Black-and-White/Full Color at 300dpi)
Dimensions (H x W x D)	155mm x 565mm x 530mm (fee	der and reader)
Weight	Approx. 14.1kg (feeder and reader)	
	Jnit-F1 (2-sided Double pass A	
Paper Size	A3, B4, A4, A4R, B5, B5R, A5, A5I	
Paper Weight	Single sided original	42 to 157gsm
aper meigrit	Double sided original	50 to 157gsm
Max. Number of	100 sheets (80gsm)	30 to 137 gain
Originals	100 sileets (80gsiii)	
	Ci	A side discounting to the sate (selector)
Document Scanning	Copying	1-sided scanning: 46 sheets/minute
Speed	-	(A4 in Black-and-White/Full Color at 600dpi)
	Scanning	1-sided scanning: 51 sheets/minute
		(A4 in Black-and-White/Full Color at 300dpi)
Dimensions (W x D x H)	137mm x 565mm x 540mm (fee	
Weight	Approx. 7.5kg (feeder and reader)	
Cassette Feeding Unit	t-AD2	
Туре	2 Front-loading adjustable drawer	S
Paper Size		R, B5, B5R, A5R, and Custom size
	(139.7mm x 182mm to 304.8mi	
Paper Capacity	550 sheets (80gsm) x 2 cassettes	
Dimensions (W x D x H)	251mm x 620mm x 700mm	
Weight Approx.	28 kg	
Paper Deck Unit-B2	26 Kg	
Paper Size	A4	
Paper Capacity	2,700 sheets (80gsm)	
Dimensions (W x D x H)	473mm x 372mm x 603mm	
Weight Approx.	37kg	
Inner Finisher-E1		
Number of Trays	One stack tray (Optional 2nd Tray)	
Tray Capacity	A4, A5, A5R	500 sheets
	A3, A4R	500 sheets
Staple Position	Corner, Double	
Staple Capacity	A4	50 sheets
Judic capacity	A3	30 sheets
Dimensions (My D.: 11)		20 SHECES
Dimensions (W x D x H)	234mm x 865mm x 540mm	
Weight	Approx. 11.5kg (Approx.13kg with	1 орионат tray)
Staple Finisher-J1		
Number of Trays	2 Trays	
Tray Capacity	A4, A5, A5R	1300 on upper tray, 1700 on lower tray
	A3, A4R	650 on upper tray, 650 on lower tray
Staple Position	Corner, Double	
	Corner, Double	50 sheets (80asm)
	A4	50 sheets (80gsm)
Staple Capacity	A4 A3, A4R	50 sheets (80gsm) 30 sheets (80gsm)
Staple Capacity Dimensions (W x D x H)	A4 A3, A4R 1,097mm x 677mm x 646mm	
Staple Capacity Dimensions (W x D x H) Weight	A4 A3, A4R	
Staple Capacity Dimensions (W x D x H) Weight Booklet Finisher-J1	A4 A3, A4R 1,097mm x 677mm x 646mm Approx. 46kg	
Staple Capacity Dimensions (W x D x H) Weight Booklet Finisher-J1	A4 A3, A4R 1,097mm x 677mm x 646mm	
Staple Capacity Dimensions (W x D x H) Weight Booklet Finisher-J1 Number of Trays	A4 A3, A4R 1,097mm x 677mm x 646mm Approx. 46kg 2 Trays	30 sheets (80gsm)
Staple Capacity Dimensions (W x D x H) Weight Booklet Finisher-J1 Number of Trays	A4 A3, A4R 1,097mm x 677mm x 646mm Approx. 46kg 2 Trays A4, A5, A5R	30 sheets (80gsm) 1300 on upper tray, 1700 on lower tray
Staple Capacity Dimensions (W x D x H) Weight Booklet Finisher-J1 Number of Trays Tray Capacity	A4 A3, A4R 1,097mm x 677mm x 646mm Approx. 46kg 2 Trays A4, A5, A5R A3, A4R	30 sheets (80gsm)
Staple Capacity Dimensions (W x D x H) Weight Booklet Finisher-J1 Number of Trays Tray Capacity	A4 A3, A4R 1,097mm x 677mm x 646mm Approx. 46kg 2 Trays A4, A5, A5R	30 sheets (80gsm) 1300 on upper tray, 1700 on lower tray
Staple Capacity Dimensions (W x D x H) Weight Booklet Finisher-J1 Number of Trays Tray Capacity Staple Position	A4 A3, A4R 1,097mm x 677mm x 646mm Approx. 46kg 2 Trays A4, A5, A5R A3, A4R	30 sheets (80gsm) 1300 on upper tray, 1700 on lower tray 650 on upper tray, 650 on lower tray
Staple Capacity Dimensions (W x D x H) Weight Booklet Finisher-J1 Number of Trays Tray Capacity Staple Position	A4 A3, A4R 1,097mm x 677mm x 646mm Approx. 46kg 2 Trays A4, A5, A5R A3, A4R Caner, Double, Booklet stitch A4	30 sheets (80gsm) 1300 on upper tray, 1700 on lower tray [650 on upper tray, 650 on lower tray] 50 sheets (80gsm)
Staple Capacity Dimensions (W x D x H) Weight Booklet Finisher-11 Number of Trays Tray Capacity Staple Position Staple Capacity	A4 A3, A4R 1,097mm x 677mm x 646mm Approx. 46kg 2 Trays A4, A5, A5R A3, A4R Corner, Double, Booklet stitch A4 A3, A4R	30 sheets (80gsm) 1300 on upper tray, 1700 on lower tray 650 on upper tray, 650 on lower tray 50 sheets (80gsm) 30 sheets (80gsm)
Staple Capacity Dimensions (W x D x H) Weight Booklet Finisher-J1 Number of Trays Tray Capacity Staple Position Staple Capacity Booklet Stitch	A4 A3, A4R 1,097mm x 677mm x 646mm Approx. 46kg 2 Trays A4, A5, A5R A3, A4R Corner, Double, Booklet stitch A4 A3, A4R Paper Size	30 sheets (80gsm) 1300 on upper tray, 1700 on lower tray 650 on upper tray, 650 on lower tray 50 sheets (80gsm) 30 sheets (80gsm) A3, B4, and A4R
Staple Position Staple Capacity Dimensions (W x D x H) Weight Booklet Finisher-J1 Number of Trays Tray Capacity Staple Position Staple Capacity Booklet Stitch Specifications	A4 A3, A4R 1,097mm x 677mm x 646mm Approx. 46kg 2 Trays A4, A5, A5R A3, A4R Corner, Double, Booklet stitch A4 A3, A4R Paper Size Max Saddle Stitch Capacity	30 sheets (80gsm) 1300 on upper tray, 1700 on lower tray 650 on upper tray, 650 on lower tray 50 sheets (80gsm) 30 sheets (80gsm)
Staple Capacity Dimensions (W x D x H) Weight Booklet Finisher-J1 Number of Trays Iray Capacity Staple Position Staple Capacity Booklet Stitch	A4 A3, A4R 1,097mm x 677mm x 646mm Approx. 46kg 2 Trays A4, A5, A5R A3, A4R Corner, Double, Booklet stitch A4 A3, A4R Paper Size	30 sheets (80gsm) 1300 on upper tray, 1700 on lower tray 650 on upper tray, 650 on lower tray 50 sheets (80gsm) 30 sheets (80gsm) A3, B4, and A4R

Weight Approx. 75kg

Other Optional Accessories

Color Image Reader-F2, Platen Cover Type 5, Pedestal, Paper Deck Unit-B2 A4, Tab Feeding Attachment Kit-B1, Envelope Feeder Attachment-D1, Copy Tray Unit-11, Utility Tray-A2, Inner 2way Tray-F1, Inner Finisher Additional Tray-A1, Buffer Pass Unit-G1, External 2 Hole Puncher-B2, Copy Card Reader-F1, Copy Card Reader Attachment-B3, Copy Control Interface Kit-A1, Serial Interface Kit-K1, FL Cassette-AG1, FL Cassette-AH1, Stamp Ink Cartridge-C1, Staple Cartridge-J1, Staple Cartridge-D2, Staple Cartridge-D3, Cassette Heater Unit-S1, Peager Deck Heater Unit-C1, Reader Heater-I1, PCL Printer Kit-AR1, PCL Font Set-A1, PS Finter Kit-AR1, Direct Print Kit (for PDF)-H1, Direct Print Kit (for XP5)-H1, Barcode Printing Kit-D1, imagePASS-B2, ColorPASS-CX400, SeeQuence Compose, SeeQuence Impose, SeeQuence Site, Ga Productivity Package, Super G3 Fax Board-AE2, Super G3 2nd Line Fax Board-AE1, Super G3 3*P/4** Line Fax Board-AE1, Super G3 5*P/4** Line Fax Board-AE1, Universal Send Digital User Signature Kit-C1, Encrypted Printing Software-D1, Secure Watermark-B1, Document Scan Lock Kit-B1, Access Management System Kit-B1, Key Switch Unit-St. SIMCH/G106B HDD-G1, 2.SINCH/117B HDD-H1, Removable HDD Kit-AC1, HDD Data Encryption & Mirroring Kit-C1, HDD Mirroring Kit-C1, LPD Mirroring Kit-D2, IR-ADV Security Kit-C1, Access Management System Kit-B1, ADF Access Handle-A1, Remote Departors Software Kit-B1, Voice Guidance-F2, Voice Operation Kit-C2

This brochure and the specifications of the product have been developed prior to the date of product launch.

This brochure and the specifications of the product have been developed prior to the date of product launch. These specifications are subject to change without notice. Therefore no representations or warranties, either express or implied, are made of the fitness of this product for a particular purpose. In no circumstances shall the information in this brochure be considered part of our terms and conditions of sale. You are advised to check the prevailing specification immediately prior to purchase. All company and/or product names are trademarks and/or registered trademarks of their respective manufacturers in their markets and/or countries.